

**6060**  
INTEGRATED AMPLIFIER


# 6060

## INTEGRATED AMPLIFIER

Creek Audio Systems has established a worldwide reputation for creative and innovative design. Its products are renowned among serious listeners for their excellent performance and engaging sound quality.

Our new range for the '90s retains the deceptively simple exterior which has become a Creek hallmark. The elegantly simple and instantly recognisable design of all Creek products conceals thoroughbred circuitry, developed to ensure the highest standards of performance. Simple and elegant design solutions, honed to perfection, and bereft of unnecessary complication, have long been a cornerstone of the Creek philosophy, and have earned our products a place in the hearts of the most demanding audio critics.

Much new circuitry has been developed for the latest Creek range, and many performance benefits have been achieved. Above all else, however, Creek products maintain the integrity of purpose with which they have long been associated. Creek Audio Systems continue to provide owners with enjoyment, satisfaction and pride of ownership.

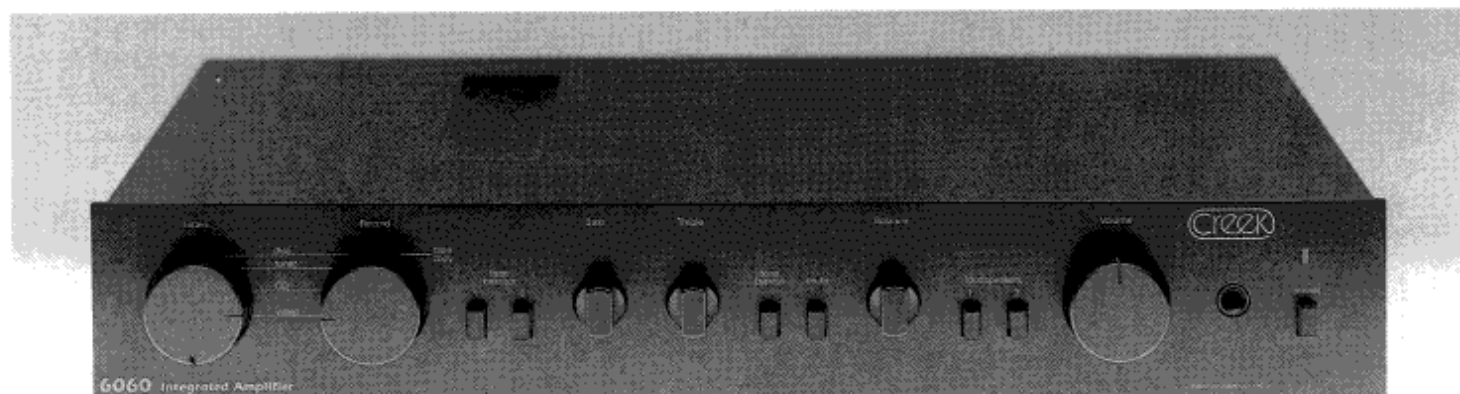


## SPECIFICATION

The 6060 is a sophisticated integrated amplifier of the highest calibre. Designed with the aid of CAD (Computer Aided Design) facilities, the 6060 is capable of producing 65 watts of power from each channel. A wealth of useful features and facilities are provided to please the audiophile and music lover alike.

Advanced circuit design is evident throughout the 6060. A generously rated power supply with excellent rejection capability forms the heart of the amplifier, while fine signal handling capability within the important pre-amplifier circuitry, and careful attention to inter-stage matching, result in unsurpassed clarity and resolution.

Among the many user features to be found on the appealing new 6060 are

- simultaneous record and play on all inputs
- comprehensive tape copy facilities
- switchable tone controls
- switchable AB speaker selection
- separate access to power amplifier input
- bridge mode facility to enable 200 watts of power in mono
- short circuit protection

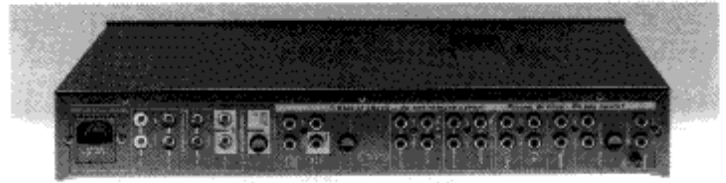

**Power output:** One channel (8 $\Omega$ ) 65 watts  
(4 $\Omega$ ) 90 watts

**Distortion:** THD at rated output (1kHz 8 $\Omega$ ) less than 0.05%

**Noise:** Referenced to rated output at 1kHz (a weighted)  
Disc (MC) 65dB  
Disc (MM) 70dB  
Tuner/CD/Video/Tape 90dB

**Separation:** Disc (MC) 45dB  
Disc (MM) 50dB  
Tuner/CD/Video/Tape 50dB

Inputs:	Sensitivity	Loading	
	Disc (MC)	0.1mV	100 $\Omega$
	Disc (MM)	2mV	47k $\Omega$
	CD	850mV	
	Tuner/Video/Tape	400mV	

**Size:** (width, height, depth) 420 x 70 x 345mm

**Weight:** 10kg



Creek Audio Systems reserve the right to modify or change the specifications of their products at any time without notice.

Creek Audio Systems is a division of Tannoy Ltd.

A member of the  plc Group of Companies

Creek Audio Systems  
Rosehall Industrial Estate,  
Coatbridge,  
Strathclyde,  
ML5 4TF,  
Scotland.

Telephone: (0236) 20199.  
Fax: (0236) 28230.  
Telex: 778621 TANMFG G.

Part No. 6483 0248